



# ATHENA



*Named after the ancient Greek goddess of wisdom and strength, Athena was named for its clever bi-levelling capacity.*

## Athena 630


**The Athena bi-levelling scissor lift can take on challenging terrain like no other scissor lift on the market.**

The Athena range of bi-levelling scissor lifts enable you to take these units anywhere you need to go. The Athena is built tough and is suitable for indoors and outdoors (including up to 20° front & back and 15° side to side inclines and uneven terrain). Finally, there is a compact scissor lift that is versatile and able to handle the challenges you throw at it. Perfect for agriculture, construction, building & park maintenance, councils, tree care and many more.

## Description

The Athena 630 is a unique bi-levelling, compact scissor lift designed with a multitude of applications in mind. Construction sites, hire companies, agriculture and facilities maintenance providers now have access to one of the most versatile access machines in the world. The Athena is simple to control and extremely adaptable to difficult and undulating terrain. Their structure has been designed to resist overload thanks to high resistance steel lifting mechanisms. Athena crawler lifts can withstand heavy and continuous use. Athena crawler lifts can withstand heavy and continuous use. A cutting-edge electronic control system manages all the testing devices [tilting, stability, excessive load, etc.], and automatically controls the engine RPM, optimising emissions and consumption while offering the operators maximum comfort during work and an excellent transfer speed.

The 220V current generator makes it possible to use electric tools at heights so there is no need for local power sources and associated leads.

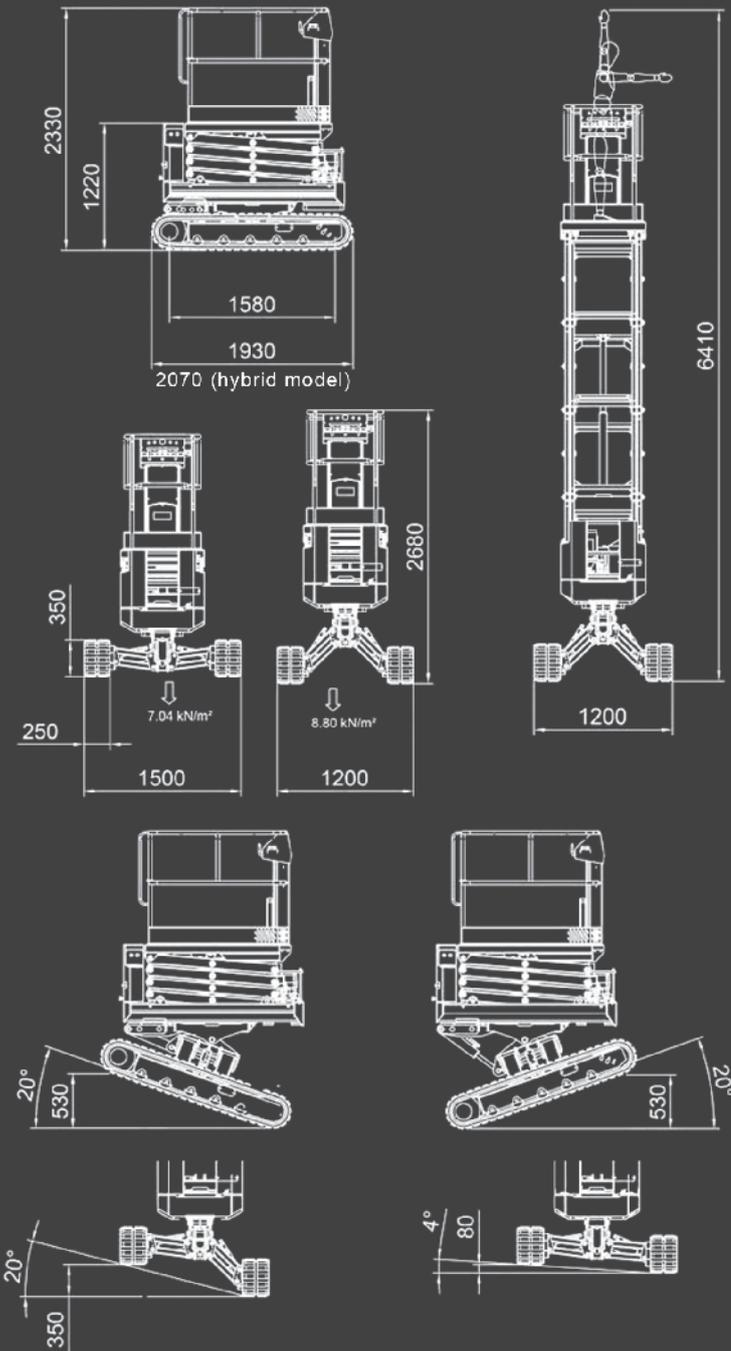

## Specifications

- 6.4 m working height
- Bi Levelling undercarriage
- 200 kg load capacity
- 1700 kg total weight
- Grade ability 25°
- Side slope 21°
- Automatic levelling on 2 axis

Basket capacity	200 kg [2 operators]
Max. working height	6.4 m
Max. height basket floor	4.4 m
Moving height	6.1 m
Lateral levelling for moving at heights	+/- 4°
Petrol engine	13 hp Honda iGX390
Battery*	16 cells Lifepo4 100Ah /51.2V
Automatic levelling	2 axis
Longitud. levelling	+/- 20°
Lateral levelling	+/- 20°
Aux. electric pump	220V-2Kw
Power generator	220V-1Kw
Gradeability	25°
Side slope	21°
Total weight	1700 / 1900* kg
Compliance	AS1415-10 2011

\* hybrid model

## Ideal Usage

- Hire companies
- Tradespeople
- Orchards and vineyards
- Landscapers
- Facilities maintenance
- Painters
- Arborists