

**CROWN**


**Specifications**


**RD 5200 Series**

Narrow-Aisle  
Reach Truck

**RD 5200**

**Series**

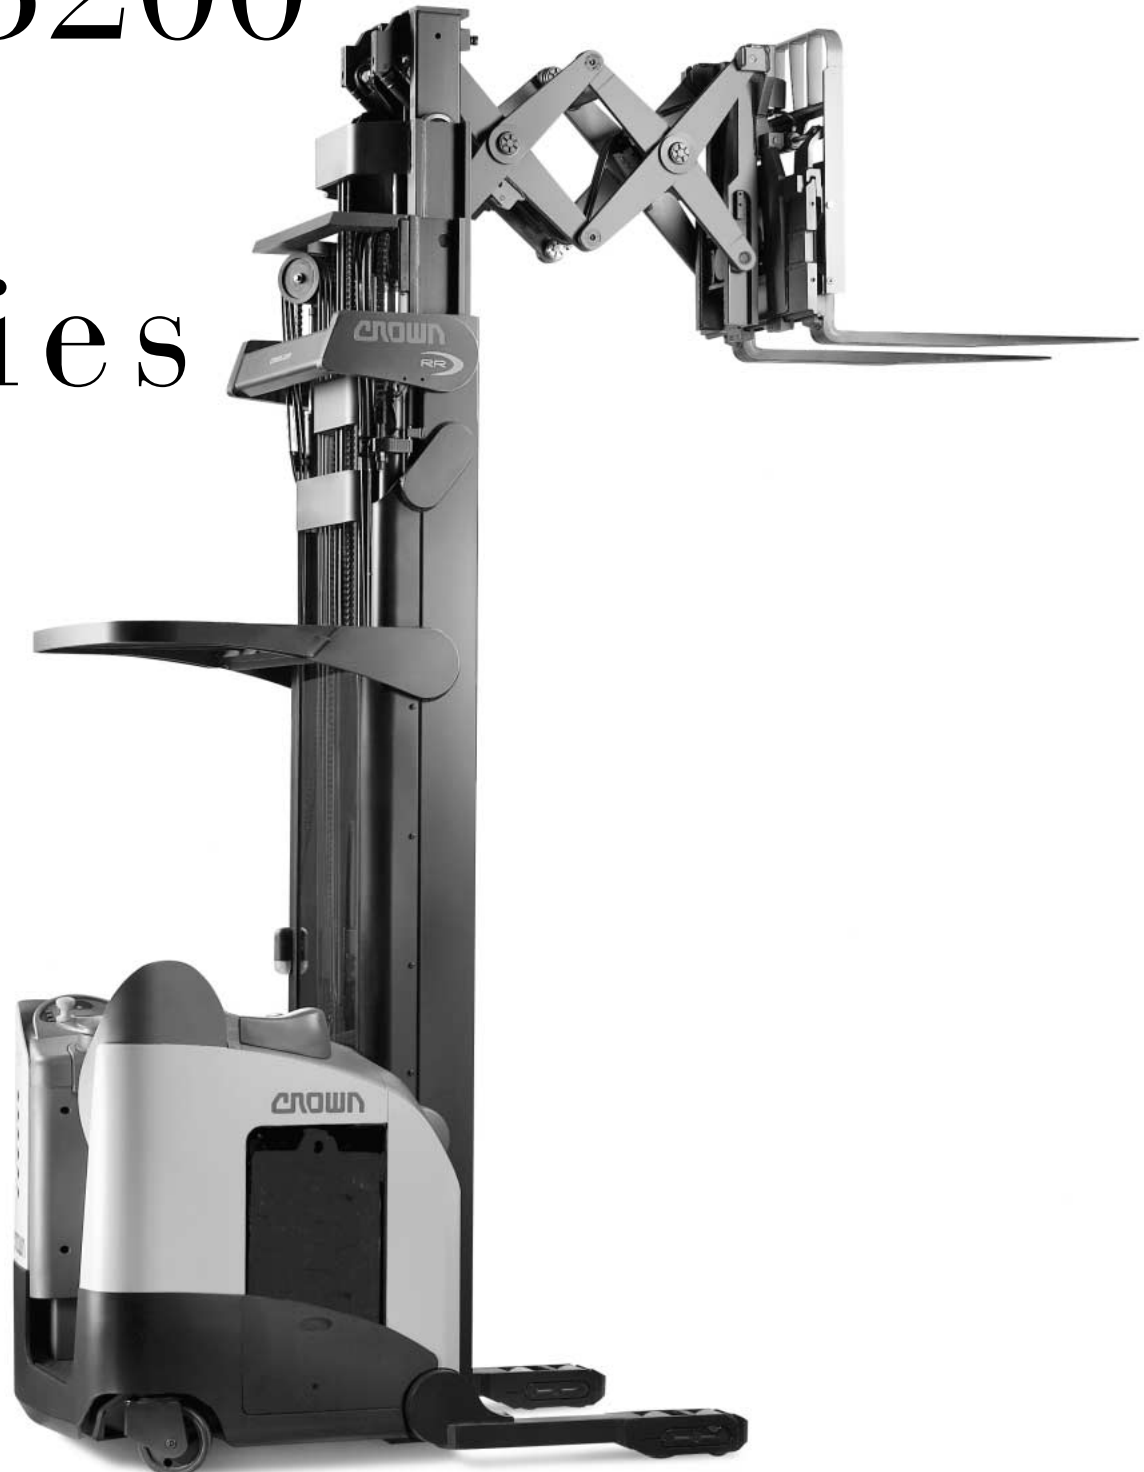

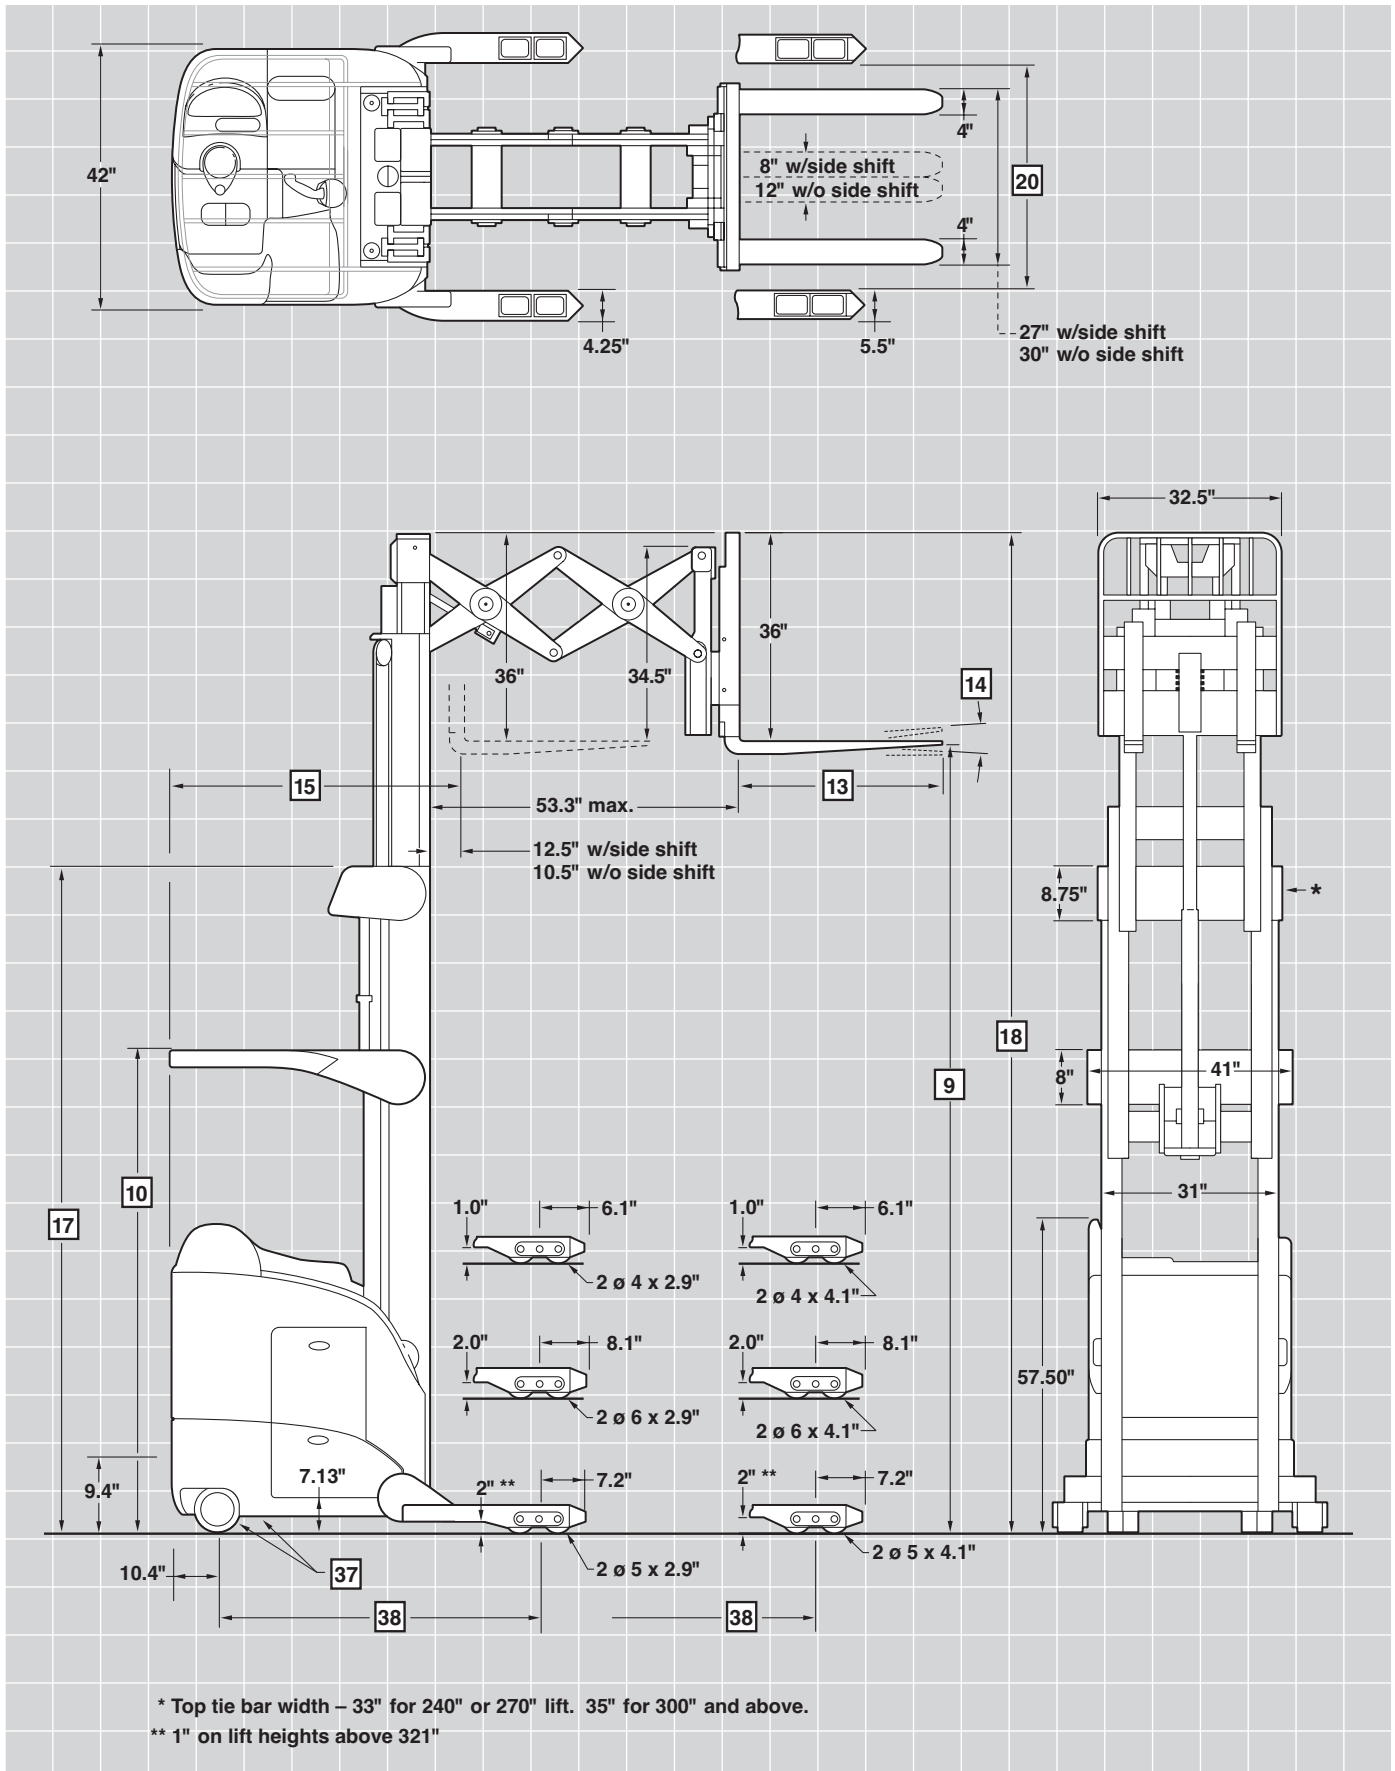

General Information	1	<b>Manufacturer</b>		<b>Crown Equipment Corporation</b>	
	2	<b>Model</b>		RD 5220-30	
	3	<b>Load Capacity*</b>	Max	lb 3000	
	4	<b>Load Center</b>	Fork Face to Load CG	in 24	
	5	<b>Power</b>		36 Volts	
	6	<b>Operator Type</b>	Reach	Stand	
	7	<b>Tire Type</b>	Load/Caster/Drive	Poly/Poly/Poly	
	8	<b>Wheels (x = driven)</b>	Load/Power Unit	4/2 (1x)	
Dimensions		<b>Mast Type</b>	Hi-Visibility	TT	
	9	<b>Lift Height</b>		in See Mast Chart	
	10	<b>Guard Height</b>		in See Mast Chart	
	13	<b>Forks</b>	Standard L x W x T	in	36 x 4 x 1.5
			Optional Lengths	in	30, 39, 42, 45, 48
	14	<b>Carriage</b>	Tilt F°/B°	degree	3/4
	15	<b>Headlength**</b>	Comp't "B"	in	56.06
			Comp't "C"	in	58.06
			Comp't "D"	in	59.81
			Comp't "E"	in	62.43
17	<b>Overall Collapsed Height</b>		in See Mast Chart		
18	<b>Overall Extended Height</b>		in See Mast Chart		
20	<b>Inside Straddle Width</b>	In 1" increments	in	34 - 50	
Performance	24	<b>Speed Travel</b>	Power Unit First (E/L)	mph	7.2/7.2
			Forks First (E/L)	mph	5.7/5.7
	24a	<b>Speed Travel with Productivity Package</b>	Power Unit First (E/L)	mph	7.8/7.2
			Forks First (E/L)	mph	6.5/5.7
	25	<b>Speed Lift***</b>	Empty	fpm	125
			1000 lb	fpm	108
			2000 lb	fpm	95
3000 lb			fpm	83	
26	<b>Speed Lower</b>	Empty/Loaded	fpm	85/90	
26a	<b>Speed Lower with Productivity Package</b>	Empty/Loaded	fpm	110/90	
Chassis	37	<b>Tires</b>	Size - Drive/Caster	in	13 x 5.5/8 x 4
	38	<b>Wheelbase (Standard Wheel)</b>	Comp't "B"	in	59.32
			Comp't "C"	in	61.32
			Comp't "D"	in	63.07
			Comp't "E"	in	65.70
	39	<b>Suspension</b>	Drive		Articulated
			Caster		Articulated, Swivel
	42	<b>Brakes</b>	Drive		Elec Release/Mech Applied
Caster				None	
Parking				Elec Release/Mech Applied	
Battery		<b>Battery Removal</b>			Both Sides
	45	<b>Type</b>			Lead Acid
	46	<b>Min Weight/Max Amp</b>	Comp't "B"	lb/amp	1600/775
			Comp't "C"	lb/amp	2000/930
			Comp't "D"	lb/amp	2280/1085
			Comp't "E"	lb/amp	2600/1240
		<b>Max Battery Size</b>	Comp't "B"	in	14.25x38.38x31
Comp't "C"			in	16.25x38.38x31	
Comp't "D"			in	18.00x38.69x31	
Comp't "E"			in	20.75x38.69x31	

\* Contact factory. Capacity may be subject to derating at height.

\*\* Add 2" with optional sideshift.

\*\*\*Maximum lift speeds available on units with the "C" Battery Compartment.

## RD 5200 Series

## Specifications

Model RD 5220-30			<b>TT</b>					
<b>Mast</b>	<b>9</b>	Lift Height	198"	210"	240"	270"	300"	
		Free Lift*	41	47	59	71	83	
	<b>10</b>	Guard Height	89	95	95	95	95	
	<b>17</b>	Overall Collapsed Height	89	95	107	119	131	
	<b>18</b>	Overall Extended Height*	246	258	288	318	348	
		Minimum Straddle OD	42	42	42	42	42	
<b>Weight</b>	Truck Weight w/o Battery		Battery Compartment					
	<b>RD 5220-30</b>	"B"	lb	5954	6064	6377	na	na
		"C"	lb	5998	6108	6421	6710	7217
		"D"	lb	6040	6150	6463	6752	7259
		"E"	lb	6095	6205	6518	6807	7314

Model RD 5220-30			<b>TT</b>				
<b>Mast</b>	<b>9</b>	Lift Height	321"	341"	366"	400"	
		Free Lift*	92	101	112	124	
	<b>10</b>	Guard Height	95	95	95	95	
	<b>17</b>	Overall Collapsed Height	140	149	160	172	
	<b>18</b>	Overall Extended Height*	369	389	414	448	
		Minimum Straddle OD	42	49	50	53	
<b>Weight</b>	Truck Weight w/o Battery		Battery Compartment				
	<b>RD 5220-30</b>	"C"	lb	7394	na	na	na
		"D"	lb	7436	7691	na	na
		"E"	lb	7491	7746	7962	8196

\*With load backrest.  
Above 321" 6" high load wheel standard.

**Capacity**

Model RD 5220-30: 3000 lb at 24" load center, 36 volt

**Batteries**

Battery removal from left or right side of truck. Standard battery compartment rollers for extraction with mechanized equipment.

**Standard Equipment**

1. Crown Integrated Control System with Access 1 2 3<sup>®</sup> diagnostics
2. 36 volt system
3. Work Relief Center
  - Variable side stance
  - Flexible five-point positioning
  - Back support with integral hip support
  - Arm/elbow support padding
  - Padded compartment interior walls
  - Operator console with work surface and storage
  - Lower storage compartment
  - Suspended floor
  - 270 square inch floor area
  - Entry bar
  - Non-skid rubber floor mat
  - Console light
4. "Multi-task" controller, urethane covered
5. Urethane covered steer tiller
6. Hydrostatic power steering
7. Standard display
  - Four-character message mode, three-button access
  - Access 1 2 3 diagnostics with real time troubleshooting diagnostics
  - Four hour meters
  - Fuel gauge with lift interrupt
  - PIN security
8. High visibility power unit
9. High visibility mast
10. Overhead guard
11. 48" high load backrest
12. Tilting fork carriage
13. Tandem articulating load wheels
14. Silent mast staging system
15. Quiet lift pumps
16. High speed lift cut out 12" from maximum lift
17. Crown manufactured drive and lift motors
18. Offset articulated drive axle with 190° steer arc
19. Key switch
20. Horn
21. Emergency power disconnect
22. 350 amp battery connector
23. Large diameter battery rollers
24. Color-coded wiring

**Optional Equipment**

1. Mast lift heights to 400"
2. Enhanced Display Panel with 16 character alpha-numeric message center, six button direct access
3. Maximum Performance System (MPS) includes:
  - Enhanced Display
  - Rack Height Select
  - Productivity Package
  - Capacity Monitor
4. Tilt Position Assist
5. Productivity package
6. Motor brush wear and overtemp indicator, (requires enhanced display)
7. Forward steering
8. Lift limit with or without override, (requires height encoder)
9. Battery retainer with interlock
10. 36" and 42" high load backrests
11. Work lights
12. Fan
13. Corrosion/freezer conditioning
14. Load wheel sizes and compounds
15. Removable outrigger tips
16. Mesh screen mast guard
17. Overhead guard mesh
18. Crown manufactured sideshifter, 2" each way
19. Polished and tapered forks
20. Fork lengths
21. Keyless on/off switch
22. Chain slack kit
23. Drive-in rack cylinder package

**24. Work Assist™ Accessories:**

- Accessory tube
- Accessory RF mounting plate
- Accessory RF mounting bracket
- Accessory clamp
- Accessory clip pad
- Accessory hook
- Accessory clip pad and hook
- Accessory pocket

**Work Relief Center**

Soft, rounded surfaces make compartment interior more comfortable. Streamlined exterior smooths entry/exit for the operator. A lower floor height, (9.4"), first greets the operator. A new, 270 square inch floor and new patented, suspended floorboard provide comfortable footing.

A new brake pedal design allows variable side-stance positions for the operator. The operator can change positions to increase comfort and productivity.

Five-point positioning provides better control and stability, starting with the right hand on the multi-task controller and the left hand on the steer tiller. Left foot on the brake pedal and the right foot on the power-on pedal. The operator's back is naturally fitted against the wrap-around support cushion.

The multi-task controller naturally bridges Crown's current and past designs. Intuitive operation is increased, reducing the learning curve. Blending of hydraulic control functions and traction can improve productivity. Control handle activation forces are reduced. Soft grip steer tiller with hydrostatic steering reduces operator fatigue.

Operator visibility is improved with:

- Low profile power unit
- High visibility mast
- Angled mast cross bracing
- Angled overhead guard cross bars
- Variable side stance

Superior Thermal Management is the result of several unique design features: reduced heat generating components, positioning of heat generating components away from the compartment, padding to insulate the compartment from heat, and improved air paths through the truck.

Clipboard surface and console storage pockets are standard. A large storage area is located below the operator backrest.

**Crown Integrated Control System with Access 1 2 3 Diagnostics**

Crown's Integrated Control System provides unmatched truck control for all primary truck systems:

- Traction control
- Hydraulic pump control
- Hydrostatic steering
- Braking
- Display

The closed loop traction system provides high available torque utilizing a separately excited Crown manufactured motor.

Acceleration is dramatically improved, increasing productivity. On ramps or when interfacing with push-back racking, "Truck hold" feature electronically brakes the truck when the handle is in neutral. Operator does not have to release the brake pedal, improving comfort and control in these applications. Selected travel speed remains constant regardless of surfaces, load weight or grades. Less throttling of control handle means better truck control and less fatigue to the operator.

Separately excited motor technology eliminates forward and reverse contactors. Regenerative motor braking helps save energy, increases motor brush life and decreases motor temperature.

Crown's **Access 1 2 3 Diagnostics** consists of three modules. Each module is extensively tested, enclosed for protection and designed to work in a variety of applications.

Access 1 2 3 is the most comprehensive fault detection system in the industry. The service technician can actively view inputs and outputs during truck operation.

**Access 1 Module**

This is the display panel, (Standard or Enhanced) and the first point of troubleshooting. No tools are required. Access 1 has three levels of interface:

- Operator feedback
- Full functionality of the truck while monitoring analog and digital inputs and outputs.
- Components can be "driven" with full currents and voltage eliminating inconclusive continuity guesswork.

**Access 2 Module**

This is the power supply for the hydraulic system including lift, all accessory functions and load sense hydrostatic steering.

**Access 3 Module**

Full-time management control of traction, braking and other system inputs and outputs. Access 3 simplifies the system by reducing componentry including directional and pump contactors, relays and other hard-wired components.

Information On Time consists of clearly labeling each component and providing an area map showing the component location. A Quick Reference Troubleshooting Guide is supplied with each truck showing display operation, code definitions and an overall component ID of the entire truck.

**Performance Profiling**

Performance Profiling can be accessed at the display to customize truck performance for specific applications or operator requirements.

Crown's Integrated Control System provides a responsive, energy efficient and reliable machine.

Access 1 2 3 diagnostics has been extensively developed to address the real world of troubleshooting and repair.

**Travel**

Increased travel speeds improve transport productivity especially when long distances are involved. Acceleration is increased to get the operator to the task quickly. An optional Productivity Package is available to increase empty travel and lower speeds.

**Steering**

Load sense hydrostatic steering is a low idle stand-by system which reduces energy consumption. Smooth, quiet steering control with minimal operator effort required at the steer tiller. Drive tire rotates 190° for maximum maneuverability. Crown's hydrostatic steering system is simplified with significantly fewer parts, thus reducing maintenance requirements.

**Braking**

A disc brake on the motor armature shaft combined with motor regenerative braking provides sure braking with fewer parts and maintenance requirements. The offset, articulated drive-unit design improves drive tire brake force and eliminates the caster brake, simplifying the system.

**Suspension**

The offset, articulated drive-unit design provides positive floor contact.

**Load Handling**

The optional Maximum Performance System (MPS) incorporates the Enhanced Display, the Productivity Package, the Capacity Monitor and the Rack Select feature.

The Capacity Monitor shows the approximate weight on the forks and the fork height. It will alert the operator when the truck capacity is exceeded for the fork height. It will also show how high or to which lift zone you can raise the load.

The Rack Select feature allows the truck to be programmed to stop at preselected heights.

As the name implies, MPS offers the maximum productivity in those high-throughput applications.

Another useful option is the Tilt Position Assist. This allows the fork tilt to stop at a preprogrammed position. If set to a fork level condition, this will allow maximum fork clearance when entering pallets and improve productivity.

Lift and lower speeds were increased for productive pallet put away and retrieval. Blending of hydraulic and traction functions, (travel, lift, and reach), is attainable. Lift, reach and sideshift are proportional for load handling accuracy.

**Mast**

High visibility mast design with angled cross bracing and angled overhead guard braces improve visibility for high or low stacking. Crown's patented staging cushions coupled with lowering dampers and speed reductions at maximum lift improve overall load handling control.

Rolled steel outer channel masts and inner "I" beams roll on cant- ed, steel, anti-friction roller bearings for minimal current draw and long life. Telescoping mast sections nest to reduce truck length. Heavier mast cross bracing design increases stiffness. Above 270" lift, vertical mast reinforcement maintains maximum capacity.

**Display**

Two display options are available, (Standard and Enhanced) for information management on board. The Crown 5000 display has greatly simplified servicing, maintenance and fault rectification.

**Reach Mechanism**

Inner arm has a one piece plate with continuous welding. Torque plate is also used to give the mechanism stiffness to resist twisting for long-lasting durability. Outer arms are designed with large heel to provide more material for stresses to be distributed evenly. Robotically welded for maximum strength.

**Carriage**

A hook type carriage conforming to ITA specifications is used. Load backrest is standard.

**Other Options**

1. Audible travel alarm
2. Flashing lights

Safety considerations and dangers associated with audible travel alarms and flashing lights include:

- Multiple alarms and/or lights can cause confusion.
- Workers ignore the alarms and/or lights after day-in and day-out exposure.
- Operator may transfer the responsibility for "looking out" to the pedestrians.
- Annoys operators and pedestrians.

**Other Options Available**

Contact your Crown dealer.

*Dimensions and performance data given may vary due to manufacturing tolerances. Performance is based on an average size vehicle and is affected by weight, condition of truck, how it is equipped and the conditions of the operating area. Crown products and specifications are subject to change without notice.*

**Crown Equipment Corporation**

New Bremen, Ohio 45869 USA

Tel 419-629-2311

Fax 419-629-3796

crown.com

Because Crown is continually improving its products, specifications are subject to change without notice.

Crown, the Momentum symbol, Work Assist and Access 1 2 3 are trademarks of Crown Equipment Corporation.

Copyright 2001-2004 Crown Equipment Corporation  
SF12B97 Rev. 2/04  
Printed in U.S.A.